Roof ventilation profile EJOT® DBP

DBP06/01: 9812040008

Application

Profile for creating a clean finish to the ETICS in the roof area where ventilation is required (cold roof)

Properties

Perforation ratio approx. 50 %; optimum plaster integration thanks to glass fibre fabric

Storage and transport

lying on the entire surface; dry and frost-free; not above 50 °C; no direct sunlight

Dimensions and packaging	
Bar length [m]	2
Pieces / cardboard box	25
Running meter / cardboard box	50
Cardboard box / pallet	48
Running meter / pallet	2,400
Pallet height [m]	1.3

Basic profile	
Raw material	Rigid PVC – free from lead and cadmium – REACH compliant
Tolerances	Profile general tolerances 2A according to DIN 16941
Colour fastness	According to DIN EN 20105-A03 – compliance level 2

Mesh	
Glass fiber fabric	R131 or comparable (certified on the basis of EAD 040016-01-0404 / EAD 040083-00-0404)
Fabric grammage [g/m²]	160
Mesh size [mm]	4 x 4
Fabric colour/print	White neutral
Fabric width [cm]	12.5 ± 5 %
Fabric fastening	welded

PE foam tape 1	
Dimensions [mm]	1 x 9

PE foam tape 2	
Dimensions [mm]	3 x 5.5

Transfer tape	
Dimensions (width) [mm]	12.5
l Temperature resistance [°C]	80

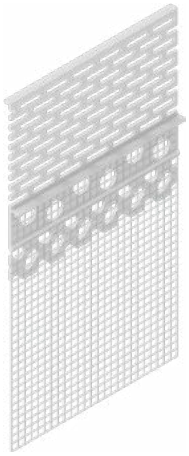

EJOT SE & Co. KG · Market Unit Construction · In der Stockwiese 35 · 57334 Bad Laasphe
T +49 2752 908-0 · F +49 2752 908-731 · construction@ejot.com · www.ejot.com/construction