

## T-FAST® wood screw JW2-STR



### Cross references

Bit hexalobular TX  
Cordless screwdriver ASCS 6.3  
Bit holder


### Application range

- > Fastening of non-pre-drilled or pre-drilled components made of wood, wood-based material and pre-drilled and pre-set steel components to non-pre-drilled or pre-drilled components made of solid wood, solid structural timber (KVH), glued-laminated timber (BSH), laminated veneer lumber (LVL) in non-weathered areas

### Properties


- > Carbon steel with zinc-plated surface, 5 µm plating thickness
- > Countersunk head with milling ribs on the underside makes it easier to countersink the head for surface-fixed installation
- > Partial thread with end mill at the transition to the non-threaded fastener shaft reduces the installation torque and simplifies the installation process
- > Optimised thread geometry for extremely fast processing
- > Special tip geometry ensures quick gripping and enables fast processing

### JW2-STR-4.0x35/24-V TX20

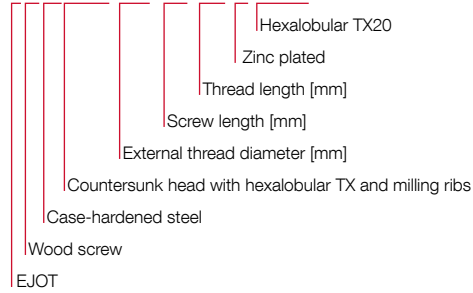


## T-FAST

### Applications



### Technical specifications



### Certifications



Product online



Order description	d [mm]	l [mm]	l <sub>g</sub> [mm]	d <sub>n</sub> [mm]	Drive	PU [pieces]	Price/100 [EUR]	Article number	EAN
<b>d 4.0</b>									
T-FAST JW2-STR-4.0x35/24-V TX20	4.0	35	24	8.0	TX20	500		3820000001	4061245071107
T-FAST JW2-STR-4.0x40/24-V TX20	4.0	40	24	8.0	TX20	500		3820000002	4061245071367
T-FAST JW2-STR-4.0x50/30-V TX20	4.0	50	30	8.0	TX20	500		3820000003	4061245071374
T-FAST JW2-STR-4.0x60/36-V TX20	4.0	60	36	8.0	TX20	500		3820000004	4061245071381
T-FAST JW2-STR-4.0x70/42-V TX20	4.0	70	42	8.0	TX20	500		3820000005	4061245071398
<b>d 4.5</b>									
T-FAST JW2-STR-4.5x50/30-V TX20	4.5	50	30	9.0	TX20	500		3820000006	4061245071404
T-FAST JW2-STR-4.5x60/36-V TX20	4.5	60	36	9.0	TX20	500		3820000007	4061245071411
T-FAST JW2-STR-4.5x70/42-V TX20	4.5	70	42	9.0	TX20	500		3820000008	4061245071428
T-FAST JW2-STR-4.5x80/48-V TX20	4.5	80	48	9.0	TX20	250		3820000009	4061245071435
<b>d 5.0</b>									
T-FAST JW2-STR-5.0x50/30-V TX25	5.0	50	30	10.0	TX25	500		3820000010	4061245071442
T-FAST JW2-STR-5.0x60/36-V TX25	5.0	60	36	10.0	TX25	500		3820000011	4061245071459
T-FAST JW2-STR-5.0x70/42-V TX25	5.0	70	42	10.0	TX25	250		3820000012	4061245071466
T-FAST JW2-STR-5.0x80/48-V TX25	5.0	80	48	10.0	TX25	250		3820000013	4061245071473
T-FAST JW2-STR-5.0x90/54-V TX25	5.0	90	54	10.0	TX25	250		3820000014	4061245071480
T-FAST JW2-STR-5.0x100/60-V TX25	5.0	100	60	10.0	TX25	250		3820000015	4061245071497
<b>d 6.0</b>									
T-FAST JW2-STR-6.0x60/36-V TX30	6.0	60	36	12.0	TX30	500		3820000016	4061245071503
T-FAST JW2-STR-6.0x80/48-V TX30	6.0	80	48	12.0	TX30	250		3820000017	4061245071510
T-FAST JW2-STR-6.0x100/60-V TX30	6.0	100	60	12.0	TX30	250		3820000018	4061245071527
T-FAST JW2-STR-6.0x120/70-V TX30	6.0	120	70	12.0	TX30	250		3820000019	4061245071534
T-FAST JW2-STR-6.0x140/70-V TX30	6.0	140	70	12.0	TX30	250		3820000020	4061245071541
T-FAST JW2-STR-6.0x160/70-V TX30	6.0	160	70	12.0	TX30	100		3820000021	4061245071558
T-FAST JW2-STR-6.0x180/70-V TX30	6.0	180	70	12.0	TX30	100		3820000022	4061245071565
T-FAST JW2-STR-6.0x200/70-V TX30	6.0	200	70	12.0	TX30	100		3820000023	4061245071572
T-FAST JW2-STR-6.0x220/70-V TX30	6.0	220	70	12.0	TX30	100		3820000024	4061245071589
T-FAST JW2-STR-6.0x240/70-V TX30	6.0	240	70	12.0	TX30	100		3820000025	4061245071596
T-FAST JW2-STR-6.0x260/70-V TX30	6.0	260	70	12.0	TX30	100		3820000026	4061245071602